
Printing date August 11, 2015

Revision: August 11, 2015

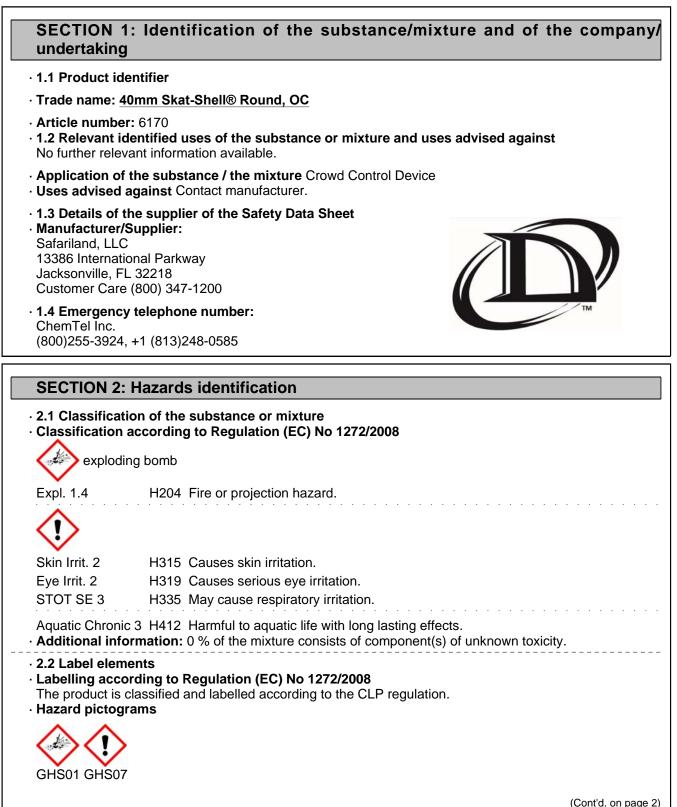

Printing date August 11, 2015

Revision: August 11, 2015

Trade name: 40mm Skat-Shell® Round, OC

(Cont'd. from page 1) Signal word Warning · Hazard statements H204 Fire or projection hazard. H315 Causes skin irritation. H319 Causes serious eye irritation. H335 May cause respiratory irritation. H412 Harmful to aquatic life with long lasting effects. · Precautionary statements P210 Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. P250 Do not subject to grinding/shock/friction. Avoid breathing dust. P261 Wash thoroughly after handling. P264 P280 Wear protective gloves / eye protection. P271 Use only outdoors or in a well-ventilated area. P305+P351+P338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. P373 DO NOT fight fire when fire reaches explosives. P370+P380 In case of fire: Evacuate area. P304+P340 IF INHALED: Remove person to fresh air and keep comfortable for breathing. P312 Call a POISON CENTER/doctor if you feel unwell. P372 Explosion risk in case of fire. P332+P313 If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. P337+P313 P302+P352 IF ON SKIN: Wash with plenty of water. P362+P364 Take off contaminated clothing and wash it before reuse. P401 Store in accordance with local/regional/national/international regulations. P405 Store locked up. Dispose of contents/container in accordance with local/regional/national/international P501 regulations. · Additional information: Contains lead. Should not be used on surfaces liable to be chewed or sucked by children. Contains Rosin. May produce an allergic reaction. Can become highly flammable in use. · NFPA ratings (scale 0 - 4) Health = 3Fire = 0Reactivity = 3The substance demonstrates unusual reactivity with water. · HMIS-ratings (scale 0 - 4) HEALTH 2 Health = 2 FIRE • Fire = 0 Reactivity = 3 Warning: Contains lead salt(s). Long-term health hazard. (Cont'd. on page 3)

Printing date August 11, 2015

Revision: August 11, 2015

Trade name: 40mm Skat-Shell® Round, OC

(Cont'd. from page 2)

· 2.3 Other hazards

- · Results of PBT and vPvB assessment
- · PBT: Not applicable.
- · vPvB: Not applicable.

· Explosive Product Notice

PREVENTION OF ACCIDENTS IN THE USE OF EXPLOSIVES - The prevention of accidents in the use of explosives is a result of careful planning and observance of the best known practices. The explosives user must remember that he is dealing with a powerful force and that various devices and methods have been developed to assist him in directing this force. He should realize that this force, if misdirected, may either kill or injure both him and his fellow workers.

WARNING - All explosives are dangerous and must be carefully handled and used following approved safety procedures either by or under the direction of competent, experienced persons in accordance with all applicable federal, state, and local laws, regulations, or ordinances. If you have any questions or doubts as to how to use any explosive product, DO NOT USE IT before consulting with your supervisor, or the manufacturer, if you do not have a supervisor. If your supervisor has any questions or doubts, he should consult the manufacturer before use.

SECTION 3: Composition/information on ingredients

· 3.2 Mixtures

· Description:

Product will contain various combinations of the following substances. Not all substances will be in each product.

Mixture of substances listed below with nonhazardous additions.

Dangerous components:	
CAS: 9004-70-0	Nitrocellulose, colloided, granular
EC number: 603-037-0	🔗 Expl. 1.1, H201
CAS: 7757-79-1	potassium nitrate
EINECS: 231-818-8	🚸 Ox. Sol. 2, H272
CAS: 1309-48-4	magnesium oxide
EINECS: 215-171-9	substance with a Community workplace exposure limit
Index number: 025-199-09-0	
CAS: 55-63-0	glycerol trinitrate / nitroglycerin
EINECS: 200-240-8	🔗 Unst. Expl., H200
Index number: 603-034-00-X	
	🕉 STOT RE 2, H373
	🚯 Aquatic Chronic 2, H411
	Flam. Liq. 2, H225
CAS: 7778-74-7	potassium perchlorate
EINECS: 231-912-9	🛞 Ox. Sol. 1, H271
Index number: 017-008-00-5	🗄 Acute Tox. 4, H302
	(Cont'd. on page 4)

Printing date August 11, 2015

Revision: August 11, 2015

Trade name: 40mm Skat-Shell® Round, OC

	(Cont'd. from page 3)
CAS: 7704-34-9 EINECS: 231-722-6 Index number: 016-094-00-1	sulfur Skin Irrit. 2, H315
CAS: 85-98-3 EINECS: 201-645-2	1,3-diethyldiphenylurea Acute Tox. 4, H302 Aquatic Chronic 3, H412
CAS: 7439-89-6 EINECS: 231-096-4	iron substance with a Community workplace exposure limit
CAS: 8050-09-7 EINECS: 232-475-7 Index number: 650-015-00-7	Rosin Skin Sens. 1, H317
CAS: 122-39-4 EINECS: 204-539-4 Index number: 612-026-00-5	diphenylamine Acute Tox. 3, H301; Acute Tox. 3, H311; Acute Tox. 3, H331 STOT RE 2, H373 Aquatic Acute 1, H400; Aquatic Chronic 1, H410
CAS: 7440-50-8 EINECS: 231-159-6	copper substance with a Community workplace exposure limit
CAS: 7440-66-6	zinc metal
CAS: 69012-64-2 EINECS: 273-761-1	Silica-Amorphous Silica fume substance with a Community workplace exposure limit
CAS: 8023-77-6 EINECS: 288-920-0	Oleoresin Capsicum Eye Dam. 1, H318 Acute Tox. 4, H302; Skin Irrit. 2, H315
	e identity and exact percentages are being withheld as a trade secret. Iazard Statements refer to section 16.
Notable Trace Components	
CAS: 15245-44-0 EINECS: 239-290-0 Index number: 609-019-00-4	lead 2,4,6-trinitro-m-phenylene dioxide/ lead styphnate Unst. Expl., H200 Carc. 1B, H350; Repr. 1A, H360Df; STOT RE 2, H373 Aquatic Acute 1, H400; Aquatic Chronic 1, H410 Acute Tox. 4, H302; Acute Tox. 4, H332

SECTION 4: First aid measures

· 4.1 Description of first aid measures

• General information:

Immediately remove any clothing soiled by the product. Take affected persons out into the fresh air. • After inhalation: Remove victim to fresh air. Seek medical help for symptoms or if unconscious.

(Cont'd. on page 5)

Printing date August 11, 2015

Trade name: 40mm Skat-Shell® Round, OC

(Cont'd. from page 4) · After skin contact: Brush off loose particles from skin. If skin irritation continues, consult a doctor. · After eye contact: Remove contact lenses if worn. Rinse opened eye for several minutes under running water. If symptoms persist, consult a doctor. · After swallowing: Rinse out mouth and then drink plenty of water. Do not induce vomiting; call for medical help immediately. · 4.2 Most important symptoms and effects, both acute and delayed Blast injury if mishandled. May cause respiratory irritation. Coughing Nausea Dizziness Cramp Breathing difficulty Irritant to skin and mucous membranes. Irritant to eyes. · Hazards Danger of blast or crush-type injuries. Danger of impaired breathing. · 4.3 Indication of any immediate medical attention and special treatment needed If necessary oxygen respiration treatment. Product may produce physical injury if mishandled. Treatment of these injuries should be based on the blast and compression effects. **SECTION 5: Firefighting measures** · 5.1 Extinguishing media · Suitable extinguishing agents: DO NOT fight fire when fire reaches explosives. Flood area with water. If no water is available, carbon dioxide, dry chemical or earth may be used. If the fire reaches the cargo, withdraw and let fire burn. · For safety reasons unsuitable extinguishing agents: None. 5.2 Special hazards arising from the substance or mixture Fire or projection hazard. Formation of toxic gases is possible during heating or in case of fire. Product may explode if burned in confined space. Individual cartridges may explode. Mass explosion of many cartridges at once is unlikely. 5.3 Advice for firefighters · Protective equipment: Wear self-contained respiratory protective device. Wear fully protective suit. · Additional information Eliminate all ignition sources if safe to do so. Cool endangered receptacles with water spray. (Cont'd. on page 6)

Printing date August 11, 2015

Revision: August 11, 2015

Trade name: 40mm Skat-Shell® Round, OC

(Cont'd. from page 5)

Evacuate area and fight fire from from the upwind side.

Flammability Classification: (defined by 29 CFR 1910.1200) Explosive. Can explode under fire conditions. Individual devices will randomly explode. Will not mass explode if multiple devices are involved. Burning material may produce toxic and irritating vapors. In unusual cases, shrapnel may be thrown from exploding devices under containment. See 2008 Emergency response Guidebook for further information.

SECTION 6: Accidental release measures

· 6.1 Personal precautions, protective equipment and emergency procedures FOR ALL TRANSPORTATION ACCIDENTS, CALL CHEMTEL AT 1-800-255-3924. Spills of this material should be handled carefully. Do not subject materials to mechanical shock or extreme heat. A spill of this material will normally not require emergency response team capabilities. Remove persons from danger area. Wear protective equipment. Keep unprotected persons away. Ensure adequate ventilation Protect from heat. Keep away from ignition sources. Isolate area and prevent access. 6.2 Environmental precautions: Do not allow to enter sewers/ surface or ground water. Inform respective authorities in case of seepage into water course or sewage system. · 6.3 Methods and material for containment and cleaning up: Send for recovery or disposal in suitable receptacles. Dispose contaminated material as waste according to section 13. Do not flush with water or aqueous cleansing agents · 6.4 Reference to other sections See Section 7 for information on safe handling. See Section 8 for information on personal protection equipment.

See Section 13 for disposal information.

SECTION 7: Handling and storage

• 7.1 Precautions for safe handling

Use only in well ventilated areas.

- Handle with care. Avoid jolting, friction and impact.
- Information about fire and explosion protection: Protect from heat.

Keep respiratory protective device available.

Emergency cooling must be available in case of nearby fire.

- · 7.2 Conditions for safe storage, including any incompatibilities
- · Storage:
- Requirements to be met by storerooms and receptacles: Avoid storage near extreme heat, ignition sources or open flame.
- Information about storage in one common storage facility: Store away from foodstuffs.
- Further information about storage conditions: Store in cool, dry conditions in well sealed receptacles.

(Cont'd. on page 7)

OSHA GHS

Printing date August 11, 2015

Revision: August 11, 2015

(Cont'd. from page 6)

Trade name: 40mm Skat-Shell® Round, OC

• 7.3 Specific end use(s) No further relevant information available.

SECTION 8: Exposure controls/personal protection

· Additional information about design of technical facilities: No further data; see section 7.

· 8.1 Control parameters

· 8.1 Control parameters			
-	 Ingredients with limit values that require monitoring at the workplace: 		
1309-48-4 ma	1309-48-4 magnesium oxide		
PEL (USA)	Long-term value: 15* mg/m ³ fume; *total particulate		
TLV (USA)	Long-term value: 10* mg/m ³ *as inhalable fraction		
EL (Canada)	Short-term value: 10** mg/m ³ Long-term value: 10* 3** mg/m ³ *inhalable fume;**respirable dust and fume		
EV (Canada)	Long-term value: 10 mg/m³ inhalable		
55-63-0 glyce	erol trinitrate / nitroglycerin		
PEL (USA)	Ceiling limit: 2 mg/m³, 0,2 ppm Skin		
REL (USA)	Short-term value: 0,1 mg/m³ Skin		
TLV (USA)	Long-term value: 0,46 mg/m³, 0,05 ppm Skin		
EL (Canada)	Long-term value: 0,05 ppm Skin		
EV (Canada)	Long-term value: 0,5 mg/m³, 0,05 ppm Skin		
7439-89-6 iro	n		
EV (Canada)	Long-term value: 1* 5** mg/m ³ as iron;*salts, water-soluble;**welding fume		
8050-09-7 Ro	osin		
TLV (USA)	DSEN, RSEN, L		
EL (Canada)	S		
122-39-4 dipl	-		
REL (USA)	Long-term value: 10 mg/m ³		
TLV (USA)	Long-term value: 10 mg/m ³		
EL (Canada)	Long-term value: 10 mg/m ³		
EV (Canada)	Long-term value: 10 mg/m ³		
	(Cont'd. on page 8)		

Printing date August 11, 2015

Revision: August 11, 2015

Trade name: 40mm Skat-Shell® Round, OC

	(Cont'd. from page 7)
7440-50-8 со	
PEL (USA)	Long-term value: 1* 0,1** mg/m ³ as Cu *dusts and mists **fume
REL (USA)	Long-term value: 1* 0,1** mg/m ³ as Cu *dusts and mists **fume
TLV (USA)	Long-term value: 1* 0,2** mg/m³ *dusts and mists; **fume; as Cu
EL (Canada)	Long-term value: 1* 0,2** mg/m³ *dusts and mists; **fume, as Cu
EV (Canada)	Long-term value: 0,2* 1** mg/m ³ as copper, *fume;**dust and mists
69012-64-2 S	ilica-Amorphous Silica fume
TLV (USA)	TLV withdrawn
EL (Canada)	Long-term value: 4* 1,5** mg/m ³ fume *total; **respirable
EV (Canada)	Long-term value: 2 mg/m ³ respirable
 8.2 Exposure Personal prot General prot The usual pre Do not inhale Keep away fre Immediately r Wash hands I Avoid contact Respiratory I Wear positive quantities. 	tective equipment: ective and hygienic measures: cautionary measures are to be adhered to when handling chemicals. dust / smoke / mist. om foodstuffs, beverages and feed. emove all soiled and contaminated clothing. before breaks and at the end of work. with the eyes and skin. protection: e pressure NIOSH or European EN149 vapor respirators when deploying product in large
Wear gloves w The glove ma Due to missi preparation/ tl	when handling deployed rounds. terial has to be impermeable and resistant to the product/ the substance/ the preparation. ng tests no recommendation to the glove material can be given for the product/ the he chemical mixture. the glove material on consideration of the penetration times, rates of diffusion and the
The selection	of the suitable gloves does not only depend on the material, but also on further marks of tries from manufacturer to manufacturer. As the product is a preparation of several (Cont'd. on page 9)

Printing date August 11, 2015

Revision: August 11, 2015

Trade name: 40mm Skat-Shell® Round, OC

(Cont'd. from page 8) substances, the resistance of the glove material can not be calculated in advance and has therefore to be checked prior to the application. Penetration time of glove material The exact break through time has to be found out by the manufacturer of the protective gloves and has to be observed. · Eye protection: Safety glasses · Limitation and supervision of exposure into the environment No special requirements. No further relevant information available. · Risk management measures See Section 7 for additional information. Organizational measures should be in place for all activities involving this product. No further relevant information available. **SECTION 9: Physical and chemical properties** 9.1 Information on basic physical and chemical properties · General Information · Appearance: Form: Solid material Colour: Dark grey · Odour: Characteristic · Odour threshold: Not determined. · pH-value: Not applicable. · Change in condition

Melting point/Melting range: Not Determined. Boiling point/Boiling range: Undetermined. Not applicable. · Flash point: · Flammability (solid, gaseous): Highly flammable. Contact with water liberates extremely flammable gases. · Auto/Self-ignition temperature: Not determined. · Decomposition temperature: Not determined. · Self-igniting: Product is not self-igniting. Danger of explosion: Fire or projection hazard. · Explosion limits: Lower: Not determined. Upper: Not determined. · Vapour pressure: Not applicable. (Cont'd. on page 10)

Printing date August 11, 2015

Revision: August 11, 2015

Trade name: 40mm Skat-Shell® Round, OC

		(Cont'd. from page 9)
· Density:	Not determined.	
· Relative density	Not determined.	
· Vapour density	Not applicable.	
· Evaporation rate	Not applicable.	
· Solubility in / Miscibility with		
water:	Insoluble.	
· Partition coefficient (n-octanol	/water): Not determined.	
· Viscosity:		
Dynamic:	Not applicable.	
Kinematic:	Not applicable.	
 9.2 Other information 	No further relevant information available.	
SECTION 10: Stability and	1 reactivity	
Fire or projection hazard. Reacts with strong acids and alk Reacts violently with oxidising ag	itions to be avoided: ored according to specifications. eactions neated above the decomposition point. ali. gents. es of ignition, open flame, incompatible materials. xidizers	
SECTION 11: Toxicologic	al information	

• 11.1 Information on toxicological effects

· Acute toxicity

· LD/LC50 values relevant for classification:

55-63-0 glycerol trinitrate / nitroglycerin

Oral	LD50	115 mg/kg (mouse)
		105 mg/kg (rat)
Dermal	LD50	29 mg/kg (rat)
		280 mg/kg (rabbit)

(Cont'd. on page 11)

Printing date August 11, 2015

Revision: August 11, 2015

Trade name: 40mm Skat-Shell® Round, OC

Oral	3 1,3-diethyldiphenylurea
Ulai	LD50 780 mg/kg (rat, female) Female
122-39	-4 diphenylamine
Oral	LD50 1120 mg/kg (rat)
Prima	ry irritant effect:
	s based on exposure to dusts/mists/spray/vapours released during deployment. Unused produced
	ot possess these effects.
	orrosion/irritation s skin irritation.
	is eye damage/irritation
	s serious eye irritation.
	ratory or skin sensitisation Based on available data, the classification criteria are not met.
Acute	effects (acute toxicity, irritation and corrosivity): Irritating to eyes, respiratory system and ski effects (carcinogenity, mutagenicity and toxicity for reproduction):
	cell mutagenicity
	on available data, the classification criteria are not met.
	ogenicity on available data, the classification criteria are not met.
	ductive toxicity
	on available data, the classification criteria are not met.
	single exposure
	ause respiratory irritation.
	repeated exposure
	on available data, the classification criteria are not met. Ition hazard
	on available data, the classification criteria are not met.
SEC	ION 12: Ecological information
	TION 12: Ecological information
12.1 T	oxicity
12.1 T Aquat	oxicity ic toxicity:
12.1 T Aquat The pr	oxicity ic toxicity: oduct contains materials that are harmful to the environment.
12.1 T Aquat The pr 85-98-	oxicity ic toxicity: oduct contains materials that are harmful to the environment. 3 1,3-diethyldiphenylurea
12.1 T Aquat The pr 85-98- LC50	oxicity ic toxicity: oduct contains materials that are harmful to the environment. 3 1,3-diethyldiphenylurea 15,6 mg/l (zebra fish)
12.1 T Aquat The pr 85-98- LC50 12.2 P	oxicity ic toxicity: oduct contains materials that are harmful to the environment. 3 1,3-diethyldiphenylurea 15,6 mg/l (zebra fish) ersistence and degradability The product is partially biodegradable. Significant residuals rema
12.1 T Aquat The pr 85-98- LC50 12.2 P 12.3 B	oxicity ic toxicity: oduct contains materials that are harmful to the environment. 3 1,3-diethyldiphenylurea 15,6 mg/l (zebra fish) ersistence and degradability The product is partially biodegradable. Significant residuals rema ioaccumulative potential May be accumulated in organism
12.1 T Aquat The pr 85-98- LC50 12.2 P 12.3 B 12.4 N	oxicity ic toxicity: oduct contains materials that are harmful to the environment. 3 1,3-diethyldiphenylurea 15,6 mg/l (zebra fish) ersistence and degradability The product is partially biodegradable. Significant residuals rema ioaccumulative potential May be accumulated in organism obility in soil No further relevant information available.
12.1 T Aquat The pr 85-98- LC50 12.2 P 12.3 B 12.4 M Additi	oxicity ic toxicity: oduct contains materials that are harmful to the environment. 3 1,3-diethyldiphenylurea 15,6 mg/l (zebra fish) ersistence and degradability The product is partially biodegradable. Significant residuals rema ioaccumulative potential May be accumulated in organism
12.1 T Aquat The pr 85-98 - LC50 12.2 P 12.3 B 12.4 M Additi Gener This st	oxicity ic toxicity: oduct contains materials that are harmful to the environment. 3 1,3-diethyldiphenylurea 15,6 mg/l (zebra fish) ersistence and degradability The product is partially biodegradable. Significant residuals rema ioaccumulative potential May be accumulated in organism lobility in soil No further relevant information available. onal ecological information: al notes: atement was deduced from the properties of the single components.
12.1 T Aquat The pr 85-98- LC50 12.2 P 12.3 B 12.4 M Additi Gener This st The pr	oxicity ic toxicity: oduct contains materials that are harmful to the environment. 3 1,3-diethyldiphenylurea 15,6 mg/l (zebra fish) ersistence and degradability The product is partially biodegradable. Significant residuals rema ioaccumulative potential May be accumulated in organism lobility in soil No further relevant information available. onal ecological information: al notes: atement was deduced from the properties of the single components. oduct contains heavy metals. Avoid transfer into the environment. Specific preliminary treatment
12.1 T Aquat The pr 85-98- LC50 12.2 P 12.3 B 12.4 N Additi Gener This st The pr are ne	oxicity ic toxicity: oduct contains materials that are harmful to the environment. 3 1,3-diethyldiphenylurea 15,6 mg/l (zebra fish) ersistence and degradability The product is partially biodegradable. Significant residuals rema ioaccumulative potential May be accumulated in organism lobility in soil No further relevant information available. onal ecological information: al notes: atement was deduced from the properties of the single components. oduct contains heavy metals. Avoid transfer into the environment. Specific preliminary treatment cessary
12.1 T Aquat The pr 85-98- LC50 12.2 P 12.3 B 12.4 N Additi Gener This st The pr are ne Water	oxicity ic toxicity: oduct contains materials that are harmful to the environment. 3 1,3-diethyldiphenylurea 15,6 mg/l (zebra fish) ersistence and degradability The product is partially biodegradable. Significant residuals rema ioaccumulative potential May be accumulated in organism lobility in soil No further relevant information available. onal ecological information: al notes: atement was deduced from the properties of the single components. oduct contains heavy metals. Avoid transfer into the environment. Specific preliminary treatment cessary hazard class 2 (German Regulation) (Self-assessment): hazardous for water
12.1 T Aquat The pr 85-98- LC50 12.2 P 12.3 B 12.4 N Additi Gener This st The pr are ne Water Do not	oxicity ic toxicity: oduct contains materials that are harmful to the environment. 3 1,3-diethyldiphenylurea 15,6 mg/l (zebra fish) ersistence and degradability The product is partially biodegradable. Significant residuals rema ioaccumulative potential May be accumulated in organism obility in soil No further relevant information available. onal ecological information: al notes: atement was deduced from the properties of the single components. oduct contains heavy metals. Avoid transfer into the environment. Specific preliminary treatment cessary hazard class 2 (German Regulation) (Self-assessment): hazardous for water allow product to reach ground water, water course or sewage system.
12.1 T Aquat The pr 85-98- LC50 12.2 P 12.3 B 12.4 N Additi Gener This st The pr are ne Water Do not Dange	oxicity ic toxicity: oduct contains materials that are harmful to the environment. 3 1,3-diethyldiphenylurea 15,6 mg/l (zebra fish) ersistence and degradability The product is partially biodegradable. Significant residuals rema ioaccumulative potential May be accumulated in organism obility in soil No further relevant information available. onal ecological information: al notes: atement was deduced from the properties of the single components. oduct contains heavy metals. Avoid transfer into the environment. Specific preliminary treatment cessary hazard class 2 (German Regulation) (Self-assessment): hazardous for water allow product to reach ground water, water course or sewage system. r to drinking water if even small quantities leak into the ground.
12.1 T Aquat The pr 85-98- LC50 12.2 P 12.3 B 12.4 N Additi Gener This si The pr are ne Water Do not Dange 12.5 R	oxicity ic toxicity: oduct contains materials that are harmful to the environment. 3 1,3-diethyldiphenylurea 15,6 mg/l (zebra fish) ersistence and degradability The product is partially biodegradable. Significant residuals rema ioaccumulative potential May be accumulated in organism obility in soil No further relevant information available. onal ecological information: al notes: atement was deduced from the properties of the single components. oduct contains heavy metals. Avoid transfer into the environment. Specific preliminary treatment cessary hazard class 2 (German Regulation) (Self-assessment): hazardous for water allow product to reach ground water, water course or sewage system. r to drinking water if even small quantities leak into the ground. esults of PBT and vPvB assessment
12.1 T Aquat The pr 85-98- LC50 12.2 P 12.3 B 12.4 M Additi Gener This si The pr are ne Water Do not Dange 12.5 R PBT: I	oxicity ic toxicity: oduct contains materials that are harmful to the environment. 3 1,3-diethyldiphenylurea 15,6 mg/l (zebra fish) ersistence and degradability The product is partially biodegradable. Significant residuals rema ioaccumulative potential May be accumulated in organism obility in soil No further relevant information available. onal ecological information: al notes: atement was deduced from the properties of the single components. oduct contains heavy metals. Avoid transfer into the environment. Specific preliminary treatment cessary hazard class 2 (German Regulation) (Self-assessment): hazardous for water allow product to reach ground water, water course or sewage system. r to drinking water if even small quantities leak into the ground.

Printing date August 11, 2015

Revision: August 11, 2015

Trade name: 40mm Skat-Shell® Round, OC

• 12.6 Other adverse effects No further relevant information available.

SECTION 13: Disposal considerations

· 13.1 Waste treatment methods

· Recommendation

Must not be disposed together with household garbage. Do not allow product to reach sewage system. Must be specially treated adhering to official regulations.

The user of this material has the responsibility to dispose of unused material, residues and containers in compliance with all relevant local, state and federal laws and regulations regarding treatment, storage and disposal for hazardous and nonhazardous wastes. Residual materials should be treated as hazardous.

· Uncleaned packaging:

• Recommendation: Disposal must be made according to local official regulations.

SECTION 14: Transport information		
 14.1 UN-Number DOT, ADR, IMDG, IATA 14.2 UN proper shipping name DOT, IMDG, IATA ADR 	UN0301 Ammunition Tear-producing with bur charge or propelling charge 0301 Ammunition Tear-produc expelling charge or propelling charge	
 14.3 Transport hazard class(es) 		
·DOT		
· Class	1.4	
· Label	1.4G, 6.1, 8	
· ADR		
· Class	1.4	
· Label	1.4G+6.1+8	(Cont'd. on page 13)

(Cont'd. from page 11)

Printing date August 11, 2015

Revision: August 11, 2015

	(Cont'd. from page
·IMDG	
· Class	1.4
· Label	1.4/6.1/8
·IATA	
· Class	1.4
· Label	1.4 (6.1, 8)
 14.4 Packing group 	
· DOT, ADR, IMDG, IATA	I
 14.5 Environmental hazards: 	
Marine pollutant:	No
 14.6 Special precautions for user 	Not applicable.
· EMS Number:	<u>F-A</u> ,S-Q
· 14.7 Transport in bulk according to Ann	
Marpol and the IBC Code	Not applicable.
· Transport/Additional information:	
· ADR	
Tunnel restriction code	D/E
·IMDG	
 Limited quantities (LQ) 	0
· Excepted quantities (EQ)	Code: E2
· · · · ·	Maximum net quantity per inner packaging: 30 g
	Maximum net quantity per outer packaging: 500 g
· UN "Model Regulation":	UN0301, Ammunition Tear-producing with burst
-	expelling
	charge or propelling charge, 1.4G (6.1+8), II

SECTION 15: Regulatory information

 \cdot 15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture \cdot United States (USA)

· SARA

· Section 355 (extremely hazardous substances):

None of the ingredients are listed.

· Section 313 (Specific toxic chemical listings):

7757-79-1 potassium nitrate

(Cont'd. on page 14)

Printing date August 11, 2015

Revision: August 11, 2015

Trade name: 40mm Skat-Shell® Round, OC

	(Cont'd. from page 13
55-63-0 glycerol trinitrate / nitroglycerin	
· TSCA (Toxic Substances Control Act):	
All ingredients are listed.	
Proposition 65 (California):	
Chemicals known to cause cancer: Present in trace quantities.	
15245-44-0 lead 2,4,6-trinitro-m-phenylene dioxide/ lead styphnate	
Chemicals known to cause reproductive toxicity for females:	
None of the ingredients are listed.	
· Chemicals known to cause reproductive toxicity for males:	
None of the ingredients are listed.	
· Chemicals known to cause developmental toxicity:	
Present in trace quantities.	
15245-44-0 lead 2,4,6-trinitro-m-phenylene dioxide/ lead styphnate	
· Carcinogenic Categories	
· EPA (Environmental Protection Agency)	
7778-74-7 potassium perchlorate	NL
7440-50-8 copper	D
7440-66-6 zinc metal	D, I, I
IARC (International Agency for Research on Cancer)	
7631-86-9 silicon dioxide	3
69012-64-2 Silica-Amorphous Silica fume	3
TLV (Threshold Limit Value established by ACGIH)	
1309-48-4 magnesium oxide	A4
122-39-4 diphenylamine	A4
NIOSH-Ca (National Institute for Occupational Safety and Health)	
None of the ingredients are listed.	
· Canada	
· Canadian Domestic Substances List (DSL)	
All ingredients are listed.	
· Canadian Ingredient Disclosure list (limit 0.1%)	
122-39-4 diphenylamine	
· Canadian Ingredient Disclosure list (limit 1%)	
1309-48-4 magnesium oxide	
7631-86-9 silicon dioxide	
· Directive 2012/18/EU	
· Named dangerous substances - ANNEX I	
None of the ingredients are listed.	
	(Cont'd. on page 15

Printing date August 11, 2015

Revision: August 11, 2015

Trade name: 40mm Skat-Shell® Round, OC

(Cont'd. from page 14)

· Other regulations, limitations and prohibitive regulations

· Substances of very high concern (SVHC) according to REACH, Article 57

None of the ingredients are listed.

· 15.2 Chemical safety assessment: A Chemical Safety Assessment has not been carried out.

SECTION 16: Other information

This information is based on our present knowledge. However, this shall not constitute a guarantee for any specific product features and shall not establish a legally valid contractual relationship.

· Relevant phrases

H200 Unstable explosives.

H201 Explosive; mass explosion hazard.

H225 Highly flammable liquid and vapour.

H271 May cause fire or explosion; strong oxidiser.

H272 May intensify fire; oxidiser.

H300 Fatal if swallowed.

H301 Toxic if swallowed.

H302 Harmful if swallowed.

H310 Fatal in contact with skin.

H311 Toxic in contact with skin.

H315 Causes skin irritation.

H317 May cause an allergic skin reaction.

H318 Causes serious eye damage.

H330 Fatal if inhaled.

H331 Toxic if inhaled.

H373 May cause damage to organs through prolonged or repeated exposure.

H400 Very toxic to aquatic life.

H410 Very toxic to aquatic life with long lasting effects.

H411 Toxic to aquatic life with long lasting effects.

H412 Harmful to aquatic life with long lasting effects.

Abbreviations and acronyms:

ADR: Accord européen sur le transport des marchandises dangereuses par Route (European Agreement concerning the International Carriage of Dangerous Goods by Road) IMDG: International Maritime Code for Dangerous Goods DOT: US Department of Transportation IATA: International Air Transport Association GHS: Globally Harmonised System of Classification and Labelling of Chemicals ACGIH: American Conference of Governmental Industrial Hygienists EINECS: European Inventory of Existing Commercial Chemical Substances ELINCS: European List of Notified Chemical Substances CAS: Chemical Abstracts Service (division of the American Chemical Society) NFPA: National Fire Protection Association (USA) HMIS: Hazardous Materials Identification System (USA) DNEL: Derived No-Effect Level (REACH) PNEC: Predicted No-Effect Concentration (REACH) LC50: Lethal concentration, 50 percent LD50: Lethal dose, 50 percent PBT: Persistent, Bioaccumulative and Toxic SVHC: Substances of Very High Concern

(Cont'd. on page 16)

Printing date August 11, 2015

Revision: August 11, 2015

Trade name: 40mm Skat-Shell® Round, OC

(Cont'd. from page 15) vPvB: very Persistent and very Bioaccumulative Expl. 1.1: Explosives, Division 1.1 Expl. 1.4: Explosives, Division 1.4 Unst. Expl.: Explosives, Unstable explosives Flam. Liq. 2: Flammable liquids, Hazard Category 2 Ox. Sol. 1: Oxidising Solids, Hazard Category 1 Ox. Sol. 2: Oxidising Solids, Hazard Category 2 Acute Tox. 2: Acute toxicity, Hazard Category 2 Acute Tox. 3: Acute toxicity, Hazard Category 3 Acute Tox. 4: Acute toxicity, Hazard Category 4 Acute Tox. 1: Acute toxicity, Hazard Category 1 Skin Irrit. 2: Skin corrosion/irritation, Hazard Category 2 Eye Dam. 1: Serious eye damage/eye irritation, Hazard Category 1 Eye Irrit. 2: Serious eye damage/eye irritation, Hazard Category 2 Skin Sens. 1: Sensitisation - Skin, Hazard Category 1 STOT SE 3: Specific target organ toxicity - Single exposure, Hazard Category 3 STOT RE 2: Specific target organ toxicity - Repeated exposure, Hazard Category 2 Aquatic Acute 1: Hazardous to the aquatic environment - AcuteHazard, Category 1 Aquatic Chronic 1: Hazardous to the aquatic environment - Chronic Hazard, Category 1 Aquatic Chronic 2: Hazardous to the aquatic environment - Chronic Hazard, Category 2 Aquatic Chronic 3: Hazardous to the aquatic environment - Chronic Hazard, Category 3 Sources SDS Prepared by: ChemTel Inc. 1305 North Florida Avenue Tampa, Florida USA 33602-2902 Toll Free North America 1-888-255-3924 Intl. +01 813-248-0573 Website: www.chemtelinc.com